

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number: **0 431 923 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

- (43) Date of publication of patent specification: **07.06.95** (51) Int. Cl.<sup>6</sup>: **C07C 31/20, C07C 29/149, C07D 307/08**  
(21) Application number: **90313218.1**  
(22) Date of filing: **05.12.90**

(54) Process for producing 1,4-butanediol and tetrahydrofuran.

(30) Priority: **07.12.89 JP 316474/89**

(43) Date of publication of application:  
**12.06.91 Bulletin 91/24**

(45) Publication of the grant of the patent:  
**07.06.95 Bulletin 95/23**

(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IT LI LU NL SE**

(56) References cited:  
**EP-A- 0 143 634**  
**EP-A- 0 190 617**  
**EP-A- 0 373 947**  
**GB-A- 1 293 151**

(73) Proprietor: **Tonen Corporation**  
**1-1, Hitotsubashi, 1-Chome**  
**Chiyoda-Ku**  
**Tokyo (JP)**

(72) Inventor: **Suzuki, Sadakatsu**  
**1-4-2-215, Nishitsurugaoka,**  
**Ooi-machi**  
**Iruma-gun,**  
**Saitama-ken (JP)**  
Inventor: **Ichiki, Tatsumi**  
**941-13-2-103 Kamekubo,**  
**Ooi-machi**  
**Iruma-gun,**  
**Saitama-ken (JP)**  
Inventor: **Ueno, Hiroshi**  
**398-1, Haneo**  
**Namekawa-machi**  
**Hiki-gun,**  
**Saitama-ken (JP)**

(74) Representative: **Bawden, Peter Charles et al**  
**EXXON CHEMICAL LIMITED**  
**EXXON CHEMICAL TECHNOLOGY CENTRE**  
**PO Box 1**  
**Abingdon**  
**Oxfordshire OX13 6BB (GB)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

**Description**

The present invention relates to a process for producing 1,4-butanediol and tetrahydrofuran. More particularly, the present invention relates to a process for producing 1,4-butanediol and tetrahydrofuran by the catalytic hydrogenation of  $\gamma$ -butyrolactone which is performed in gas phase in the presence of a specific catalyst. According to a preferred embodiment, the  $\gamma$ -butyrolactone is produced by the catalytic hydrogenation of maleic anhydride which is performed in liquid phase in the presence of a catalyst.

**PRIOR ART**

Since 1,4-butanediol is a useful compound as a raw material for polybutylene terephthalate resin and polyurethane resin, there has been a strong demand for a process for producing it efficiently and economically.

There are known processes (as explained below) for producing 1,4-butanediol by the catalytic hydrogenation of maleic anhydride and/or succinic anhydride or a derivative thereof.

(a) A process for producing 1,4-butanediol by the hydrogenation of maleic anhydride and/or maleic acid in liquid phase in the presence of a catalyst containing an element (or a compound thereof) belonging to the VII subgroup and VIII subgroup of the periodic table. (Japanese Patent Laid-open No. 133212/1976)

(b) A process for producing 1,4-butanediol by the hydrogenative decomposition of maleic acid diester or fumaric acid diester in gas phase in the presence of a copper chromite catalyst. (Japanese Patent Laid-open No. 22035/1986 and Japanese Patent Published Publication No. 501702/1987)

The present inventors also proposed a process for producing 1,4-butanediol by the catalytic hydrogenation of maleic anhydride and/or succinic anhydride in gas phase in the presence of a copper oxide-zinc oxide catalyst. (Japanese Patent Application No. 175062/1988)

There are also known processes (as explained below) for producing  $\gamma$ -butyrolactone by the catalytic hydrogenation of maleic anhydride and/or succinic anhydride in liquid phase or gas phase.

(c) A process for producing  $\gamma$ -butyrolactone by the catalytic hydrogenation of maleic anhydride in liquid phase in the presence of a nickel catalyst. (Japanese Patent Publication No. 6946/1968)

(d) A process for producing  $\gamma$ -butyrolactone and tetrahydrofuran by the catalytic hydrogenation of maleic anhydride in the presence of a nickel catalyst in combination with rhenium or a rhenium compound. (Japanese Patent publication No. 6947/1986)

(e) A process for producing  $\gamma$ -butyrolactone and/or tetrahydrofuran by the hydrogenation of maleic anhydride and/or succinic anhydride in liquid phase in the presence of a solid catalyst composed of palladium, cobalt, and niobium. (Japanese Patent Laid-open No. 111975/1987)

On the other hand, tetrahydrofuran (as well as 1,4-butanediol) is also a useful compound as a raw material for polytetramethylene glycol and as a solvent for polyvinyl chloride and polyurethane; therefore, there has been a strong demand for a process for producing it efficiently and economically.

There are known processes (as explained below) for producing 1,4-butanediol and/or tetrahydrofuran by the catalytic hydrogenation of  $\gamma$ -butyrolactone in gas phase.

(f) A process for producing 1,4-butanediol and tetrahydrofuran by the hydrogenative decomposition of  $\gamma$ -butyrolactone in gas phase in the presence of a catalyst which is a mixture formed by reducing copper oxide and zinc oxide. (Japanese Patent Published Publication No. 500993/1983)

(g) A process for producing 1,4-butanediol by the catalytic hydrogenation of  $\gamma$ -butyrolactone in gas phase in the presence of a copper chromite catalyst. (Japanese Patent Laid-open No. 155231/1987)

(h) A process for producing tetrahydrofuran and 1,4-butanediol by the one-stage catalytic hydrogenation of maleic anhydride and/or succinic anhydride in gas phase in the presence of a solid catalyst containing copper, chromium, and manganese. (Japanese Patent Application No. 313760/1988 filed by the present inventors)

**Problems to be solved by the invention**

There are some problems involved in the above-mentioned known processes (a) and (b) for producing 1,4-butanediol by the catalytic hydrogenation of maleic anhydride and/or succinic anhydride or a derivative thereof. In other words, the hydrogenation of maleic anhydride and/or maleic acid in liquid phase in the presence of a catalyst requires a high pressure of about 200 kg/cm<sup>2</sup>. This leads to a huge amount of equipment cost and running cost. On the other hand, the hydrogenative decomposition of maleic acid diester in gas phase in the presence of a catalyst does not need the high pressure as mentioned above; however, it needs additional process for diesterifying maleic anhydride, which makes the process very

complex. That is to say, the reaction to convert a monoester into a diester (which is an equilibrium reaction) needs two stages for its completion. Thus the entire reaction needs three stages, namely, two stages for diesterification and one stage for monoesterification.

5 There is an advantage of not requiring high pressure and complex equipment in the process (h) (mentioned above and proposed by the present inventors) for producing 1,4-butanediol by the catalytic hydrogenation of maleic anhydride and/or succinic anhydride in gas phase in the presence of a catalyst. However, this advantage is set off by a disadvantage that the reaction to form 1,4-butanediol is so slow that the process is poor in space time yield.

10 There are also some problems involved in the above-mentioned known processes (f) and (g) for producing 1,4-butanediol and/or tetrahydrofuran by the catalytic hydrogenation of  $\gamma$ -butyrolactone in gas phase. That is to say, they are unable to control as desired the ratio between 1,4-butanediol and tetrahydrofuran to be produced.

15 It is an object of the present invention to provide an improved process for producing 1,4-butanediol and/or tetrahydrofuran by the catalytic hydrogenation of  $\gamma$ -butyrolactone in gas phase, wherein the improvement includes the usage of a specific catalyst which increases the conversion ratio of  $\gamma$ -butyrolactone and facilitates control over the ratio between 1,4-butanediol and tetrahydrofuran to be produced.

20 It is another object of the present invention to provide an improved process for producing 1,4-butanediol and tetrahydrofuran simultaneously from maleic anhydride economically in a high space time yield, unlike the conventional complex process which needs a high equipment cost and running cost.

#### *Means to solve the problems*

##### Summary of the invention


25 The present inventors carried out extensive studies in search of a catalytic hydrogenation of maleic anhydride which would give 1,4-butanediol and tetrahydrofuran in a high space time yield at as low a pressure as possible. As a result, it was found that the object is achieved by the use of a new process for the catalytic hydrogenation of gamma -butyrolactone which is one embodiment of this invention. A further  
30 embodiment is the production of 1,4-butanediol and tetrahydrofuran by a two stage catalytic hydrogenation of maleic anhydride, the first stage for converting maleic anhydride into  $\gamma$ -butyrolactone and the second stage being the new process for converting  $\gamma$ -butyrolactone into 1,4-butanediol and tetrahydrofuran. It was also found that the second stage of the catalytic hydrogenation should be performed in gas phase in the presence of a specific catalyst.

35 The present invention relates to a process for producing 1,4-butanediol and tetrahydrofuran by the catalytic hydrogenation of  $\gamma$ -butyrolactone in gas phase in the presence of a solid catalyst containing copper and silicon, or containing copper, chromium, and manganese, or containing copper, chromium, manganese, and barium. A preferred embodiment of the present invention consists of subjecting maleic anhydride to catalytic hydrogenation in liquid phase in the presence of a catalyst, thereby forming  $\gamma$ -  
40 butyrolactone, and subsequently subjecting the  $\gamma$ -butyrolactone to catalytic hydrogenation in gas phase in the presence of a solid catalyst containing copper and silicon. The catalytic hydrogenation of maleic anhydride into 1,4-butanediol and tetrahydrofuran proceeds through the following path.

45

50

55

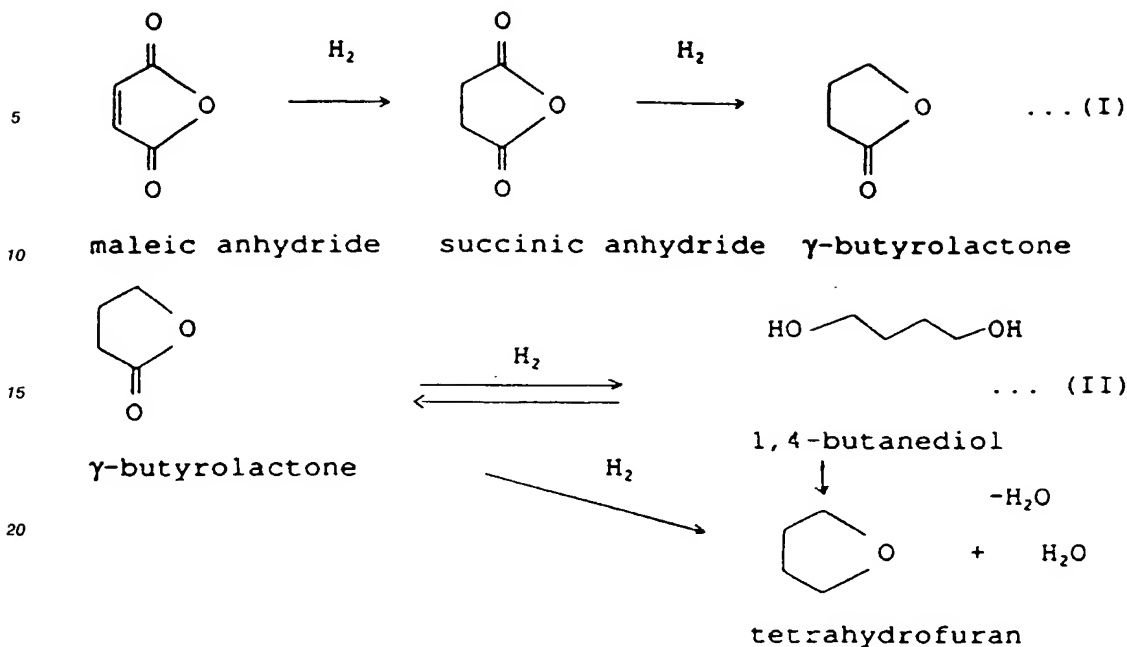

According to a preferred embodiment of the present invention, the catalytic hydrogenation (I) of maleic anhydride into  $\gamma$ -butyrolactone is carried out in liquid phase at as low a pressure as possible to avoid problems involved in the gas phase reaction, and the catalytic hydrogenation (II) of  $\gamma$ -butyrolactone into 1,4-butanediol and tetrahydrofuran is carried out in gas phase at as high a pressure as possible within a limit to keep a high ratio between hydrogen and  $\gamma$ -butyrolactone in gas phase. In this way, the equilibrium reaction (II) proceeds to give 1,4-butanediol and tetrahydrofuran advantageously.

In what follows, the present invention will be explained with reference to an embodiment which consists of producing the desired products from maleic anhydride in two stages. This embodiment is not intended to restrict the scope of the present invention.

#### **Production of $\gamma$ -butyrolactone by liquid phase process**

In this embodiment, the first stage of the reaction consists of producing  $\gamma$ -butyrolactone from maleic anhydride by catalytic hydrogenation in liquid phase.

#### Catalyst

The first stage of the reaction in liquid phase needs a catalyst which may be a known nickel catalyst, a nickel catalyst incorporated with rhenium or a rhenium compound, or a solid catalyst composed of palladium, cobalt, and niobium. It is possible to use an alternative catalyst which is prepared by reducing a commercial copper oxide-chromium oxide-manganese oxide catalyst or a commercial nickel oxide-copper oxide-cobalt oxide catalyst.

The reduction of a commercial catalyst may be accomplished by treating the catalyst with a nitrogen gas containing hydrogen. To perform the treatment, a nitrogen gas containing 2 vol% of hydrogen is passed through the catalyst bed at a gas hourly space velocity (G.H.S.V.) of about  $2400 \text{ h}^{-1}$  under a pressure of tens of  $\text{kg/cm}^2\text{G}$  at  $170^\circ\text{C}$  for 24 hours. The treatment is continued for several hours, with the hydrogen content gradually increased to 100 vol% and the temperature of the catalyst bed raised to  $200^\circ\text{C}$ . (G.H.S.V. is expressed in terms of normal temperature and normal pressure hereinafter.)

Solvent

The solvent used for the above-mentioned liquid phase reaction is not specifically limited. It includes, for example,  $\gamma$ -butyrolactone, tetrahydrofuran, dimethyl ether, diethyl ether, 1,4-dioxane, benzene, and toluene. The solvent may be omitted.

Conditions of catalytic reaction

In the above-mentioned liquid phase reaction to be performed in the first stage, the gas-liquid mixed phase (composed of maleic anhydride and hydrogen gas) is brought into contact with the catalyst by any known method using a fixed bed reactor, moving bed reactor, or fluidized bed reactor. This stage of reaction may also be carried out batchwise. The continuous operation should be carried out so that the gas-liquid mixed phase (composed of maleic anhydride and hydrogen gas) is passed through the catalyst at an LHSV of 0.001-1.0 h<sup>-1</sup>. The batchwise operation should be carried out so that the reaction continues for 0.5-16 hours. In either cases, the reaction temperature should be about 150-300 °C and the reaction pressure should be about 60-150 kg/cm<sup>2</sup>G.

The liquid phase reaction in the first stage gives rise to a reaction product which varies depending on the catalyst, reaction temperature, and reaction pressure employed. Usually, it is composed of 50-95 mol% of  $\gamma$ -butyrolactone, 1-30 mol% of tetrahydrofuran, 0.5-5 mol% of n-butanol, and 0-10 mol% of succinic anhydride.

***Production of 1, 4-butanediol and tetrahydrofuran by gas phase process***

1,4-butanediol and tetrahydrofuran are produced from  $\gamma$ -butyrolactone by the catalytic hydrogenation in gas phase. The  $\gamma$ -butyrolactone as the starting material may be the reaction product obtained in the above-mentioned liquid phase reaction. The reaction product may be used as such or after purification. This gas phase reaction corresponds to the second stage of reaction in the above-mentioned embodiment.

Catalyst

The reaction in gas phase needs a catalyst which may be formed by reducing a copper oxide-silicon oxide catalyst. The preparation of the catalyst may be performed in the following manner. First, copper nitrate (or any other copper compound) is dissolved in water. To the resulting aqueous solution is added pulverized silicon oxide (such as silica, silica gel, silica sol). The mixture is neutralized with an aqueous solution of sodium carbonate which is added dropwise while the mixture is heated and stirred. Solids are filtered off and dried. Finally, the dried solids are calcinated and molded into a desired shape using a molding machine. The thus obtained catalyst is reduced in the same manner as used for the preparation of the catalyst for the liquid phase reaction.

Solvent

The solvent used for the gas phase reaction in the present invention is not specifically limited. It includes, for example,  $\gamma$ -butyrolactone, tetrahydrofuran, dimethyl ether, diethyl ether, 1,4-dioxane, benzene, and toluene. The solvent may be omitted.

Conditions of catalytic reaction

In the above-mentioned gas phase reaction to be performed in the second stage, the mixed gas (composed of  $\gamma$ -butyrolactone and hydrogen gas) is brought into contact with the catalyst by any known method using a fixed bed reactor, moving bed reactor, or fluidized bed reactor. This stage of reaction may also be carried out batchwise. The reaction should be carried out so that the mixed gas (composed of  $\gamma$ -butyrolactone and hydrogen gas) comes into contact with the catalyst at a G.H.S.V. of 1000-100000 h<sup>-1</sup>, preferably 3000-40000 h<sup>-1</sup>. The reaction temperature should be about 150-280 °C and the reaction pressure should be about 10-100 kg/cm<sup>2</sup>G. The molar ratio of hydrogen gas to  $\gamma$ -butyrolactone is 50-1500. An adequate reaction temperature, reaction pressure, and molar ratio should be selected so that the system remains in gas phase. With a hydrogen/ $\gamma$ -butyrolactone molar ratio lower than 50, the reaction is slow and the catalyst is degraded by a carbonaceous substance which forms during the reaction. Conversely, with a molar ratio higher than 1500, the reaction is economically disadvantageous because of the necessity of

circulating a large amount of hydrogen.

The gas phase reaction in the second stage gives rise to 1,4-butanediol and tetrahydrofuran in a varied ratio depending on the reaction pressure and reaction temperature. Usually, the molar ratio of tetrahydrofuran to 1,4-butanediol is in the range of 0.05 to 200. The reaction product can be easily separated into 1,4-butanediol and tetrahydrofuran by any known method such as distillation.

#### Effect of the invention

According to one embodiment of the present invention, maleic anhydride is made into  $\gamma$ -butyrolactone by the liquid-phase reaction which poses no problems such as coking. In addition, this reaction can be performed at a much lower pressure than the convention process for converting maleic anhydride directly into 1,4-butanediol. The low pressure leads to the reduction of equipment cost and running cost. The thus obtained gamma-butyrolactone is subsequently made into 1,4-butanediol and tetrahydrofuran by the gas phase reaction. Since this gas phase reaction is an equilibrium reaction, it is possible to obtain 1,4-butanediol and tetrahydrofuran in a high space time yield, and it is also possible to control the ratio between 1,4 butanediol and tetrahydrofuran, if proper reaction conditions are chosen.

The process is economical because the reaction product in the liquid phase reaction (first stage) can be supplied without purification to the gas phase reaction (second stage). This offers an advantage that the reaction does not form a polyester as a by-product because the reaction system does not contain maleic anhydride or succinic anhydride as a raw material and 1,4-butanediol as a reaction product at the same time.

The invention will be explained with reference to the following examples, which are not intended to restrict the scope of the invention. In the examples, percentage (%) is based on weight, unless otherwise indicated.

Examples 1 shows the production of  $\gamma$ -butyrolactone, whilst Example 2 shows the embodiment of the invention in converting the  $\gamma$ -butyrolactone to 1,4-butanediol.

#### Example 1 (Preparation of $\gamma$ -butyrolactone)

The catalyst for the catalytic hydrogenation was prepared by reducing in the following manner a commercial copper oxide-chromium oxide-manganese oxide catalyst (G-89, powder type, a product of Nissan Gardlar Shokubai Co., Ltd.) containing 30.9% of copper, 31.3% of chromium, and 3.6% of manganese. First, the commercial catalyst was heated at 170 °C under a nitrogen stream at a pressure of 40 kg/cm<sup>2</sup>G. Hydrogen was slowly added to the nitrogen stream until the hydrogen content reached 2 vol%. The nitrogen stream containing 2 vol% of hydrogen was passed through the catalyst overnight at 170 °C and 40 kg/cm<sup>2</sup>G, with the G.H.S.V. being 2400 h<sup>-1</sup>. The hydrogen content in the nitrogen stream was gradually increased to 100 vol%, while keeping the catalyst bed lower than 200 °C. Finally, the reduction with hydrogen was performed at 200 °C and 40 kg/cm<sup>2</sup>G for 2 hours, with the G.H.S.V. being 2400 h<sup>-1</sup>.

In a 300-cc stainless steel autoclave equipped with an electromagnetic induction stirrer were placed 100 g of maleic anhydride and 120 g of 1,4-dioxane as a solvent. With the atmosphere in the autoclave replaced with nitrogen, 30 g of the reduced catalyst was placed in the autoclave in such a manner that the catalyst was not exposed to air. Hydrogen was forced into the autoclave, and the catalytic hydrogenation was carried out in liquid phase at 220 °C and 90 kg/cm<sup>2</sup>G, for 4 hours.

There was obtained a reaction product composed of 86.5 mol% of  $\gamma$ -butyrolactone, 6.2 mol% of tetrahydrofuran, 2.3 mol% of n-butanol, and 1.4 mol% of succinic anhydride. The conversion of maleic anhydride was 100%.

#### Example 2

The catalyst for the catalytic hydrogenation was prepared by reducing in the same manner as in Example 1 a commercial copper oxide-silicon oxide catalyst (T-366, a product of Nissan Gardlar Shokubai Co., Ltd.) containing 50.6% of copper and 12.4% of silicon in a fixed bed reactor.

With the fixed bed reactor heated to 210 °C, the catalytic hydrogenation in gas phase was performed by passing the raw material (which is the reaction product obtained in Example 1), together with 100 times (in mol) as much hydrogen as the raw material, under a pressure of 15 kg/cm<sup>2</sup>G and at a G.H.S.V. of 4800 h<sup>-1</sup>.

There was obtained a reaction product composed of 95.2 mol% of tetrahydrofuran and 4.6 mol% of n-butanol. The conversion of  $\gamma$ -butyrolactone was 100%.

**Referential Example**

The catalyst for the catalytic hydrogenation was prepared by reducing in the same manner as in Example 1 the same catalyst as used in Example 1. The catalytic hydrogenation in gas phase was performed in a single stage by passing the raw material (which is a solution of maleic anhydride (1 mol) in  $\gamma$ -butyrolactone (1 mol)), together with 200 times (in mol) as much hydrogen as the raw material. The reaction temperature was 180 °C, the reaction pressure was 40 kg/cm<sup>2</sup>G, and the G.H.S.V. was 9000 h<sup>-1</sup>.

There was obtained a reaction product composed of 15.1 mol% of 1,4-butanediol, 2.8 mol% of tetrahydrofuran, 81.9 mol% of  $\gamma$ -butyrolactone, and 0.3 mol% of n-butanol. The conversion of maleic anhydride was 100%.

**Claims**

1. A process for producing 1,4-butanediol and tetrahydrofuran which comprises catalytically hydrogenating  $\gamma$ -butyrolactone in the gas phase in the presence of a solid catalyst containing copper and silicon.
2. A process according to claim 1 in which the catalyst is obtained by reducing a copper oxide-silicon, oxide catalyst.
3. A process according to claim 1 or claim 2 in which the molar ratio of hydrogen to  $\gamma$ -butyrolactone is 50-1500.
4. A process according to any of the preceding claims in which the mixture of  $\gamma$ -butyrolactone and hydrogen gas comes into contact with the catalyst at a G.H.S.V. of 1000-100000h<sup>-1</sup>.
5. A process according to any of the preceding claims in which the reaction temperature is from 150 to 280 °C and the reaction pressure is from 10-100 Kg/cm<sup>2</sup>G.
6. A process according to any of the preceding claims in which the  $\gamma$ -butyrolactone has been produced by the hydrogenation of maleic anhydride in the liquid phase.
7. A process for producing 1,4-butanediol and tetrahydrofuran which comprises in a first stage hydrogenating maleic anhydride in the liquid phase to produce  $\gamma$ -butyrolactone and in a second stage catalytically hydrogenating  $\gamma$ -butyrolactone in the gas phase in the presence of a solid catalyst containing copper and silicon.

**Patentansprüche**

1. Verfahren zur Herstellung von 1,4-Butandiol und Tetrahydrofuran, bei dem  $\gamma$ -Butyrolacton in der Gasphase in Gegenwart eines festen Katalysators, der Kupfer und Silicium enthält, katalytisch hydriert wird.
2. Verfahren nach Anspruch 1, bei dem der Katalysator durch Reduktion eines Kupferoxid-Siliciumoxid-Katalysators erhalten wird.
3. Verfahren nach Anspruch 1 oder Anspruch 2, bei dem das Molverhältnis von Wasserstoff zu  $\gamma$ -Butyrolacton 50 bis 1500 ist.
4. Verfahren nach einem der vorhergehenden Ansprüche, bei dem die Mischung aus  $\gamma$ -Butyrolacton und Wasserstoffgas bei einem stündlichen Volumendurchsatz (GHSV) von 1000 bis 10 000 h<sup>-1</sup> in Kontakt mit dem Katalysator kommt.
5. Verfahren nach einem der vorhergehenden Ansprüche, bei dem die Reaktionstemperatur 150 bis 280 °C beträgt und der Reaktionsdruck 10 bis 100 kg/cm<sup>2</sup> Überdruck ist.
6. Verfahren nach einem der vorhergehenden Ansprüche, bei dem das  $\gamma$ -Butyrolacton durch Hydrierung von Maleinsäureanhydrid in der flüssigen Phase hergestellt worden ist.

7. Verfahren zur Herstellung von 1,4-Butandiol und Tetrahydrofuran, bei dem in einer ersten Stufe Maleinsäureanhydrid in der flüssigen Phase unter Bildung von  $\gamma$ -Butyrolacton hydriert wird, und in einer zweiten Stufe  $\gamma$ -Butyrolacton in der Gasphase in Gegenwart eines festen Katalysators, der Kupfer und Silicium enthält, katalytisch hydriert wird.

5

# Revendications

1. Procédé de production de 1,4-butanediol et de tétrahydrofuranne qui comprend l'hydrogénation catalytique de la  $\gamma$ -butyrolactone en phase gazeuse en présence d'un catalyseur solide contenant du cuivre et du silicium.
2. Procédé suivant la revendication 1, dans lequel le catalyseur est obtenu par réduction d'un catalyseur à l'oxyde de cuivre-oxyde de silicium.
3. Procédé suivant la revendication 1 ou la revendication 2, dans lequel le rapport molaire de l'hydrogène à la  $\gamma$ -butyrolactone va de 50 à 1500.
4. Procédé suivant l'une quelconque des revendications précédentes, dans lequel le mélange de  $\gamma$ -butyrolactone gazeuse et d'hydrogène gazeux vient en contact avec le catalyseur à une V.S.H.G. de 1000 à 100 000 h<sup>-1</sup>.
5. Procédé suivant l'une quelconque des revendications précédentes, dans lequel la température réactionnelle est comprise dans l'intervalle de 150 à 280 °C et la pression de réaction va de 10 à 100 kg/cm<sup>2</sup> au manomètre.
6. Procédé suivant l'une quelconque des revendications précédentes, dans lequel la  $\gamma$ -butyrolactone a été produite par hydrogénation d'anhydride maléique en phase liquide.
7. Procédé de production de 1,4-butanediol et de tétrahydrofuranne, qui comprend, dans une première étape, l'hydrogénation d'anhydride maléique en phase liquide pour produire de la  $\gamma$ -butyrolactone et, dans une seconde étape, l'hydrogénation catalytique de la  $\gamma$ -butyrolactone en phase gazeuse en présence d'un catalyseur solide contenant du cuivre et du silicium.

35

40

45

50

55